



Removal

- 1 Remove ashtray and frame (1).

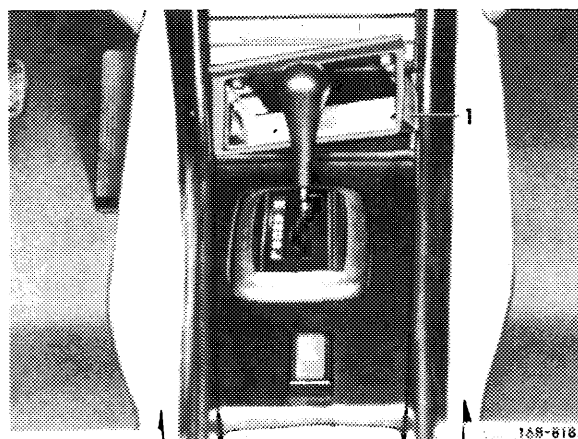

- 2 Unscrew both screws (2) on covering.
- 3 Pull covering out of lateral clamps in upward direction.
- 4 Pull plug connection from flasher switch.

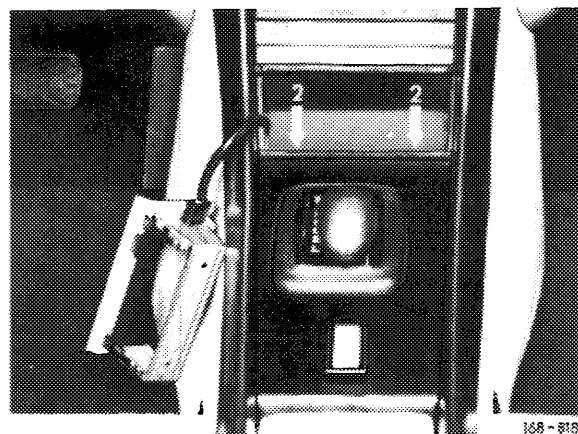

Installation

- 5 For installation proceed vice versa.