


68-430 Removal and installation of head lining

Removal

- 1 Remove reveal molding on windshield top (68-400).
- 2 Remove lining on roof frame rear (68-447).
- 3 Remove lining on roof frame laterally left and right (68-445).
- 4 Push expanding rivets (1) out of roof frame by means of a plastic wedge starting from the rear.
- 5 Disconnect roof support.
- 6 Disconnect head lining on roof frame(2).

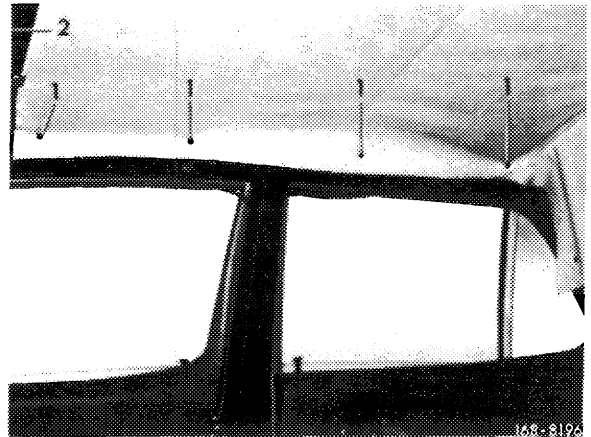

Installation

- 7 For installation proceed vice versa.