


Removal

- 1 Pull-out rear domelight (1).
- 2 Unscrew screw (3) on panelling.
- 3 Pull panelling on roof frame rear (2) out in **forward** direction.

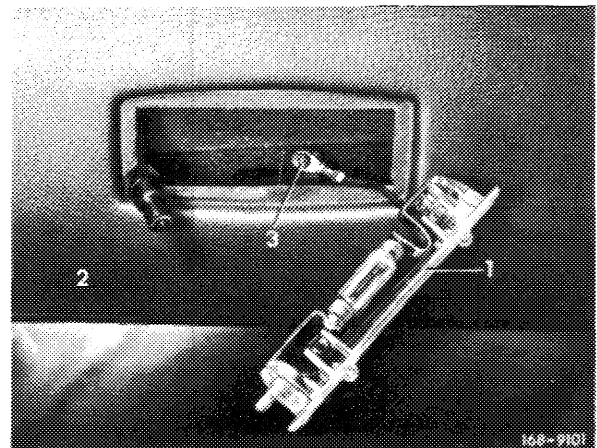

Installation

- 3 For installation proceed vice versa.