


Removal

- 1 Remove outside rear-view mirror on driver's door (72–270).
- 2 Remove cover plate (1) at driver's door right.
- 3 Starting at one end, lift trim strip with plastic wedge and pull out of clips (2) in upward direction.

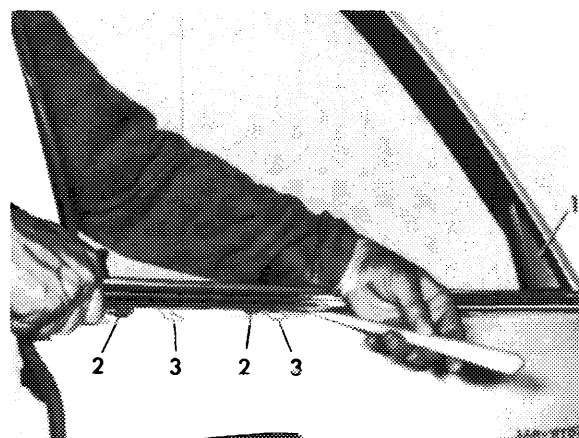

Installation

- 4 For installation proceed vice versa.

Note: Make sure that the plastic shims are correctly inserted.