

## 88–400 Removal and installation, disassembly and assembly of radiator Shell

---

### Special tool

Special pliers for holding springs on radiator grille

111 589 0337 00

---

### Removal

---

- 1 Unscrew six screws on radiator shell from rear.
- 2 Remove radiator shell with intermediate layer.

### Installation

---


- 3 For installation proceed vice versa.

**Note:** Make sure that the intermediate layer is glued to radiator shell.

### Disassembly

---

- 4 Push locking plate for Mercedes Star aside and remove Mercedes Star.
- 5 Unscrew nut (1) and remove Company emblem.
- 6 Unclip trim strips on grille and remove.
- 7 Unscrew both stop buffers (2) and remove.
- 8 Unscrew screw (3).
- 9 Remove holding springs (4) with special pliers (5).
- 10 Remove grille.

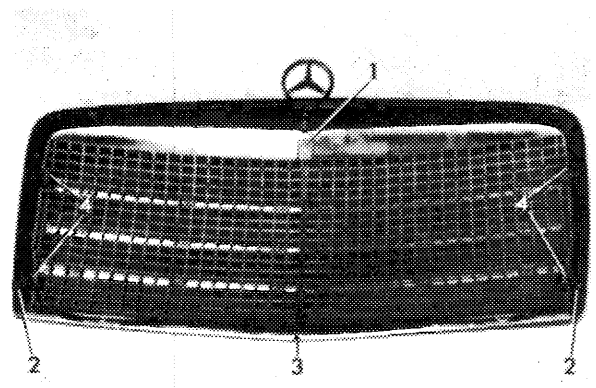


188-8511

### Assembly

---

- 11 For assembly proceed vice versa.

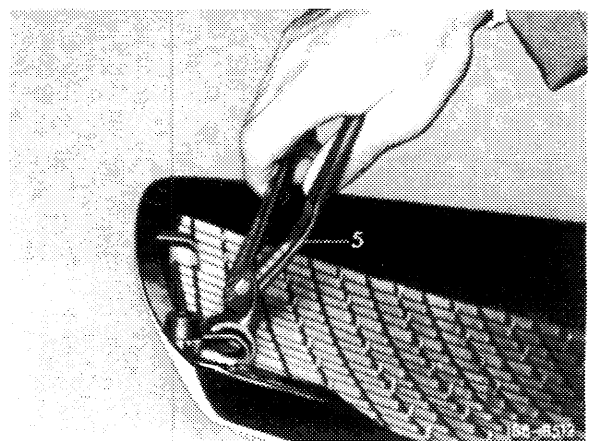

188-8512