


Shutter

Removal

- 1 Turn shutter (1) in upward direction.
- 2 Push spring washers (2) at left and right out of frame by means of a screwdriver.
- 3 Pull out shutter toward the rear.

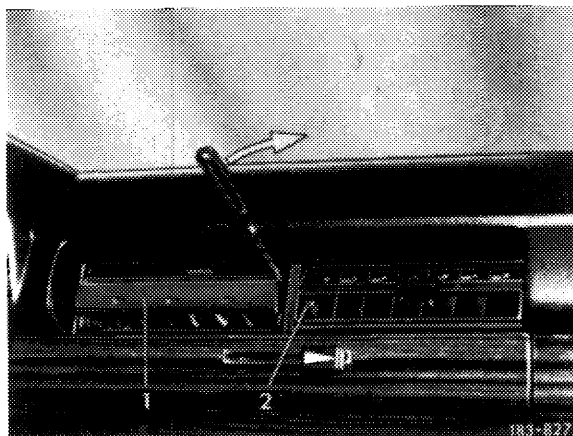


Installation

- 4 For installation proceed vice versa.

Shutter frame

Removal

- 1 Remove shutter.
- 2 Remove glove box (68–140).
- 3 Unscrew screws (3).
- 4 Reach through opening for glove box and lift out frame together with connecting hose (4).

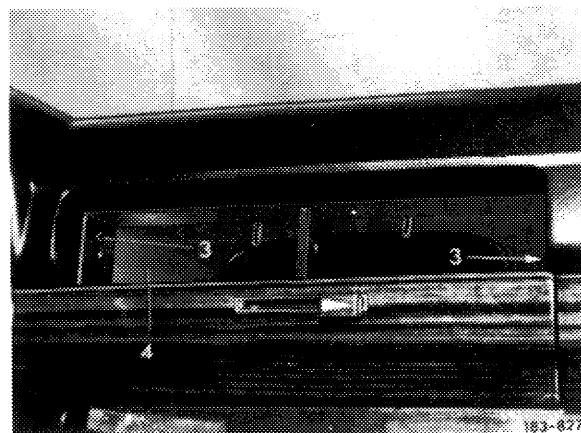

Installation

- 5 For installation proceed vice versa.