


**Removal**

---


- 1 On model 107 (1st version) remove cover for switch in center console.
- 2 Unscrew switch button (1).
- 3 Unscrew rosette and remove switch.

1st version model 107

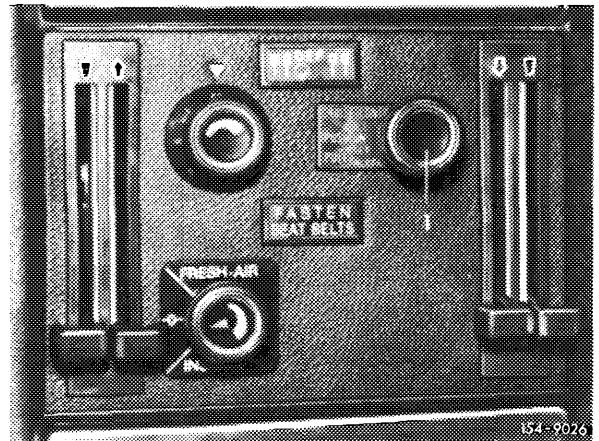



- 4 On models 107 (2nd version), 114 and 116, remove switch (1) from cover.
- 5 Pull off coupling of line harness at switch (1).

2nd version model 107

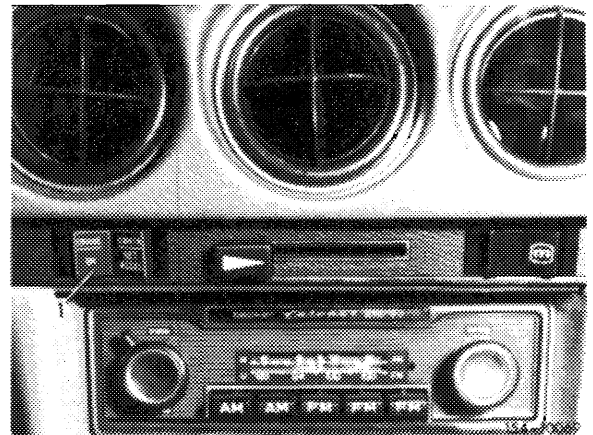

Model 114

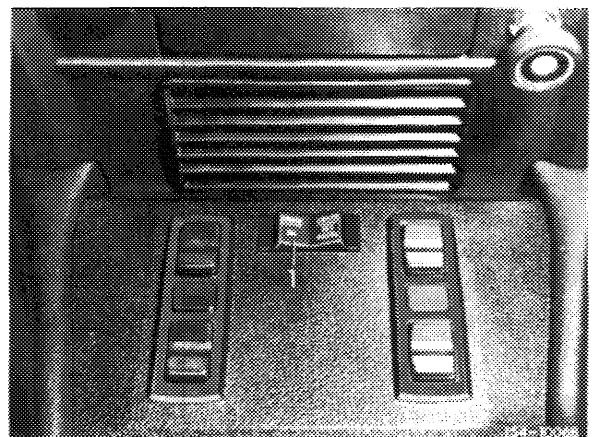

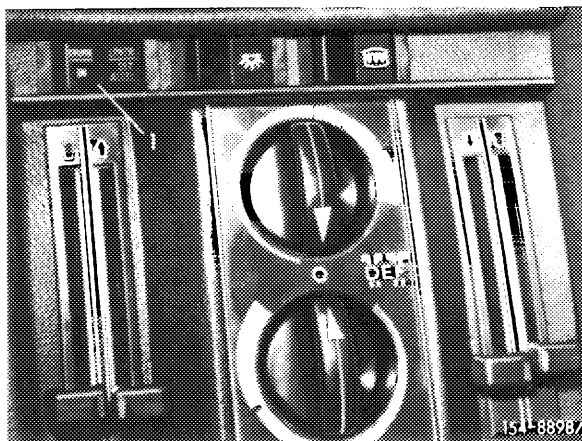

Model 116

## **Installation**

---

6 For installation proceed vice versa.

7 Perform function test on road.