



Removal

- 1 Unscrew screws (1) on panelling (2).
- 2 Release clips at top and remove panelling (2) starting at center console.

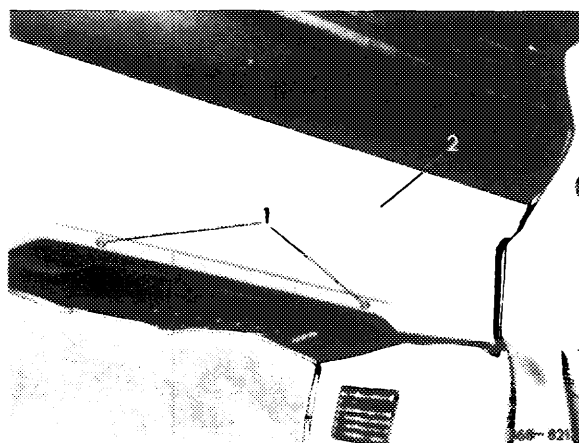

- 3 Unscrew both screws (3) on front wall.
- 4 Unscrew the four screws (4) on covering (5).
- 5 Remove covering (5) in downward direction.

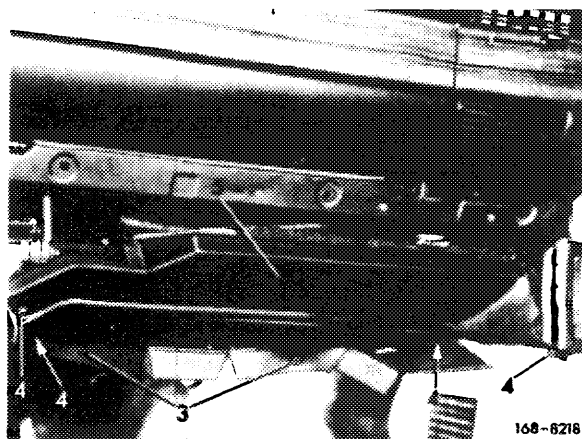

Installation

- 6 For installation proceed vice versa.

Note: The covering at the left and right under the instrument panel serves as an air duct between the heater box and the door lining, which is designed as an air duct toward the side windows. Complete assembly jobs with pertinent care.